


Seal-Tite™ P29950 / P28566 / P40630 / P36728 Fusion Wrap equivalent Silicone Elastomer Tape

Meets MIL-I-46852 / A-A-59163 Specifications

Operating temperature: -65°F to +500°F / -54°C to 260°C; Brittle temperature -85°F / -65°C

Self Binding Self-Fusing Tape - High Temperature, Heat & Flame Resistant

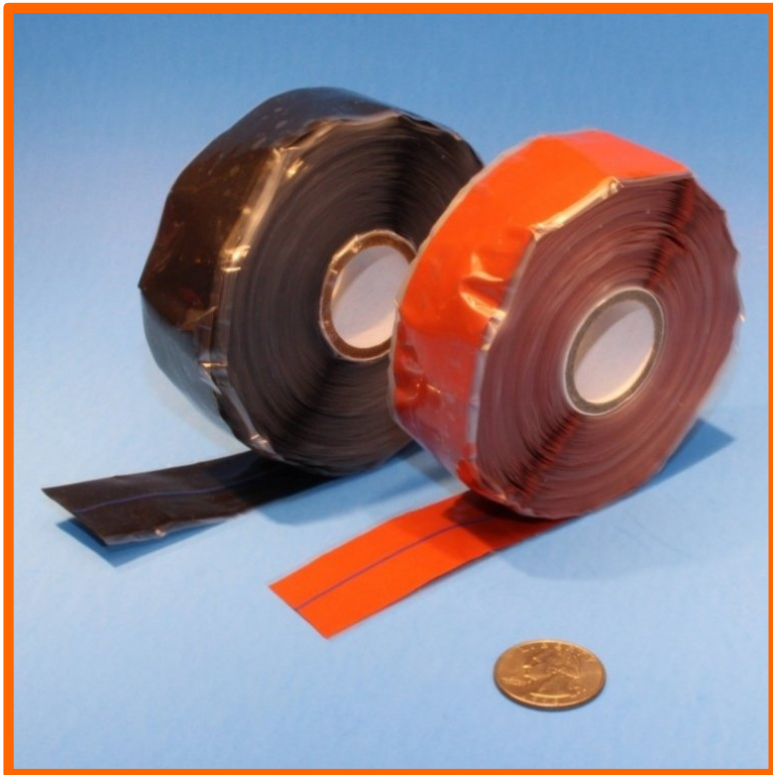

- Self-bonds / self fuses / self amalgamating. No sticky residue or adhesive when removed. Starts fusing within minutes, fully bonded within hours. Excellent cold temperature performance. Makes an excellent compression tape.
- Excellent for sealing ends of firesleeve: prevents sleeve from absorbing contamination and wicking liquids. Excellent for wrapping electrical & mechanical connections and splices. Makes clean and neat installations of cables, wires and hoses. Makes an instant separation bumper and provides vibration dampening. Secures insulation to hot air ducting.
- Meets Mil-I-46852 and A-A-59163 specifications. CofC Available.
- Standard length is 36 feet. Longer roll lengths available. Tapes are .020" thick

Seal-Tite™ P29950 / P28566 / P40630 / P36728 Fusion Wrap Equivalent Silicone Rubber Self Fusing Electrical Insulating Tape		
Part Number	Tape Width Inches / mm	Tape Length, inches / yards
T-SR-P29950-FL-GY	1 / 25	648 / 18
T-SR-P28566-FL-BK	1 / 25	648 / 18
T-SR-P40630-FL-CL	1 / 25	648 / 18
T-SR-P36728-FL-OR	1 / 25	648 / 18
T-SR-P29950-SL-GY	1 / 25	432 / 12
T-SR-P28566-SL-BK	1 / 25	432 / 12
T-SR-P40630-SL-CL	1 / 25	432 / 12
T-SR-P36728-SL-OR	1 / 25	432 / 12

- GY = Gray, OR = Oxide-Red, BK = Black, CL = Clear

Seal-Tite™ is a trademark of LAWSON Products